


PRIMER D-41

COLD APPLIED FAST DRYING PRIMER FOR GENERAL PURPOSES ASTM D-41

		TEST METHOD	MIN	MAX
1	Saybolt Furol viscosity at 25°C	ASTM D88	75	125
2	Flash point (tag open cup)°C	ASTM 3143	40	-
3	Density Kg/Ltr at 25°C	ASTM D-41	0.85	0.90
4	Bitumen softening point °C	ASTM D36	90	100
5	Distillation:			
	Distillate, vol. % of total distillate to 360 °C:	ASTM D402		
	Up to 225°C		37	-
	Up to 316°C		-	55
6	Tests on residue from distillation:	ASTM D5	25	50
	Penetration at 25°C, 0.1 mm			
7	solubility in trichloroethylene %	ASTM D2042	99	-
8	water, volume %	ASTM D-95	-	0.2
9	drying time at 25 °C in hours		1	2

NOTE : THE ABOVE SHOWN TECHNICAL DATA ARE RESULTS OBTAINED IN LABORATORY AND EXTRA DETAILS CAN BE PROVIDED UPON REQUEST. IN ACCORDANCE TO ASTM AND UEA/c STANDARDS RESULTS ARE SUBJECTED TO A VARIATION OF 20 % .

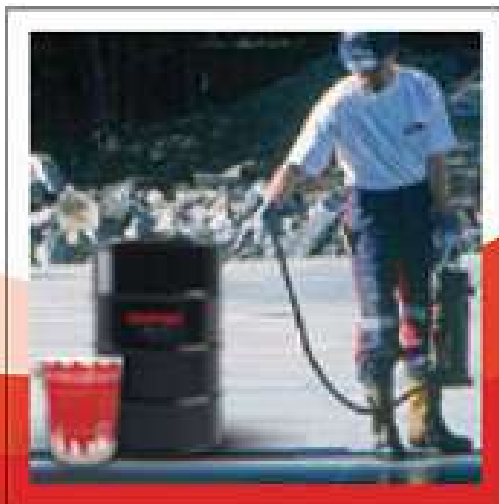

izomaks
PRIMER D-41