


IZOPROOF

COLD APPLIED FAST DRYING PRIMER FOR GENERAL PURPOSES ASTM IZOPROOF

		TEST METHOD	MIN	MAX
1	Saybolt Furol viscosity at 60°C	ASTM D88	200	300
2	Flash point (tag open cup) °C	ASTM D3143	40	-
3	Density Kg/Ltr at 25°C	ASTM D-3142	0.90	0.98
4	Bitumen softening point °C	ASTM D36	80	90
5	Distillation:	ASTM D402		
	Distillate, vol. % of total distillate to 360 °C:			
	Up to 225°C		35	-
	Up to 316°C		-	50
6	Tests on residue from distillation:	ASTM D5	20	50
	Penetration at 25°C, 0.1 mm			
7	solubility in trichloroethylene %	ASTM D2042	99	-
8	water, volume %	ASTM D-95	-	0.2
9	drying time at 25°C in hours		1	2

NOTE : THE ABOVE SHOWN TECHNICAL DATA ARE RESULTS OBTAINED IN LABORATORY AND EXTRA DETAILS CAN BE PROVIDED UPON REQUEST. IN ACCORDANCE TO ASTM AND UAE STANDARDS RESULTS ARE SUBJECTED TO A VARIATION OF 20 % .

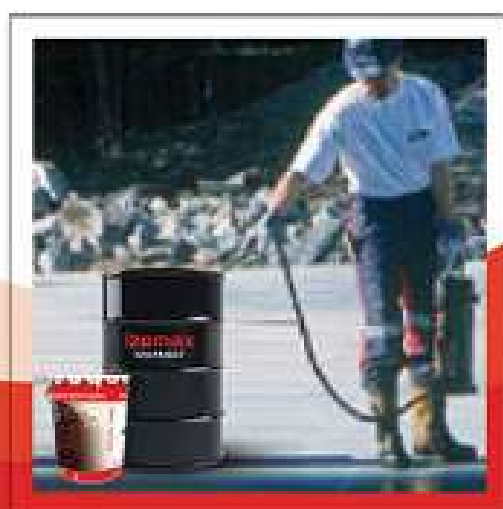

izomaks
IZOPROOF